


GP-H-HOCHDRUCK DRUCKSPEICHERAGGREGATE

MODEL		GP-300 H GE	GP-500 H GE	GP-800 H GE	GP-1.500 H GE
DAUERENTNAHME	l/h	300	500	800	1500
GERÄTEANSCHLÜSSE	SAUG	3/4"	3/4"	1"	1"
	DRUCK	1/2"	1/2"	1/2"	3/4"
SPANNUNG	VOLT	230/400	230/400	230/400	230/400
LEISTUNG	C.V.	1/2	1/2	3/4	1 ^{1/2}
	KW	0,25	0,37	0,55	1,1
MAX. DRUCK	bar	20	20	20	20
MOTOR-SCHUTZART	IP	55	55	55	55

* Auch lieferbar in 230 V Wechselstrom (WD).
- Technische Änderungen vorbehalten.

MODEL	GP-200 GE	GP-300 GE	GP-500 GE	GP-800 GE	GP-1.500 GE
A	800	800	800	1200	1450
B	720	720	720	970	970
C	370	370	370	500	550
APPROX. WEIGHT (KG)	35,8	41,4	53	89	135

SAUGDIAGRAMM

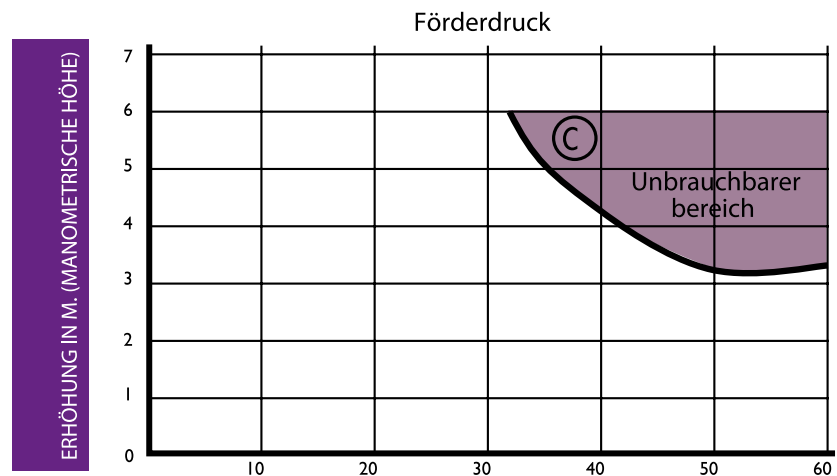

Leichtöl { kinematische Viskosität = $\nu_{37} \sim 4$ c St. Gesamtlänge Meter (l.+h.)
Dichte = $\gamma \sim 15,841$ kg/l

© GP-300, GP-500, GP-800 und GP-1.500



63457 Hanau - Voltastr., 10
Deutschland / Germany
Tel.: (+49) 06181/9587-0
info@simka.de - www.simka.de



C/Invierno, 4-6
28500 Arganda del Rey - Madrid - Spain
Tel.: (+34) 918 719 294
info@inprord.com - www.inprord.com